

FES20M / FES20

SPECIFICATION

The electric door strike shall be provided with FULL MONITORING functions:

- door latch monitoring
- solenoid monitoring
- strike securely installed within door frame (anti-tamper)

The electric door strike must have a dual voltage continuously rated coil 12 or 24 volt. The strike must be able to be configured fail safe or secure at site and should not contain loose pins and springs. The strike shall carry a 5 year warranty and have a fire resistance rating of 4 hours.

FEATURES

- 12v & 24v DC Dual Voltage Continuously Rated Coil
- Fully monitored including "strike securely installed within door frame" (anti-tamper)
- 5 year Guarantee
- Simple Fail Safe/ Fail Secure interchange, no loose pins
- Pre drilled for extension lips
- Superior holding strength
- 4 hour fire rated
- 12volt DC = 200mA
24volt DC = 100mA
- Mounting kit included

"Patent Pending"



FES20



Identical to the FES20M but without monitoring features.




FIRE & SECURITY HARDWARE P/L

"New Generation Electric Locking Solutions"


FES20M®/FES20® TECHNICAL DETAILS

RECONFIGURING FAIL SECURE / FAIL SAFE

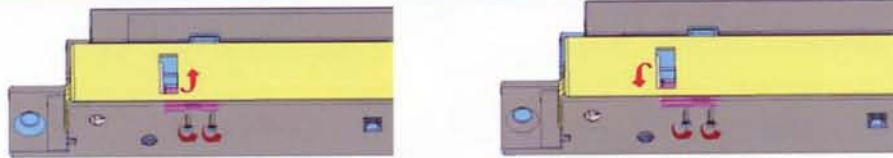


TO RECONFIGURE THE DOOR STRIKE LOOSEN THE TWO SCREWS AND ROTATE THE "CAPSTAN" WITH THE CAPSTAN TOOL IN THE REQUIRED DIRECTION


EXTENSION PLATE DETAILS

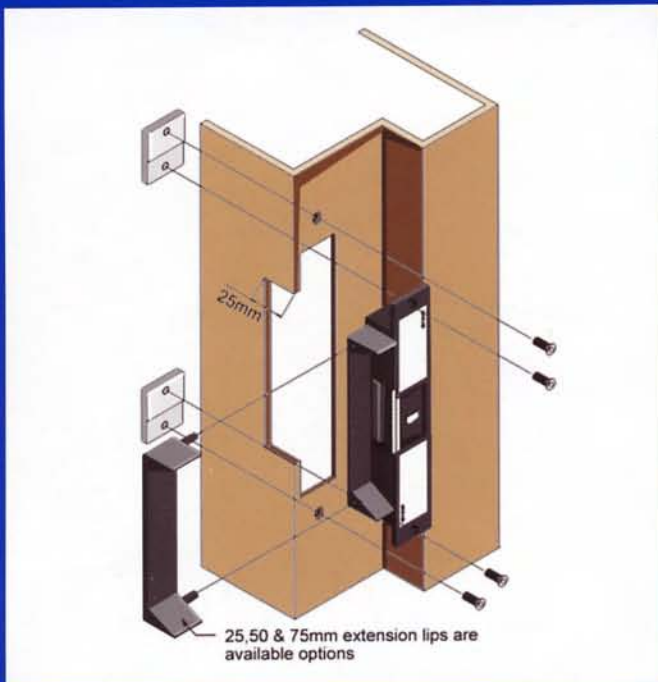


METAL FRAME CUT OUT

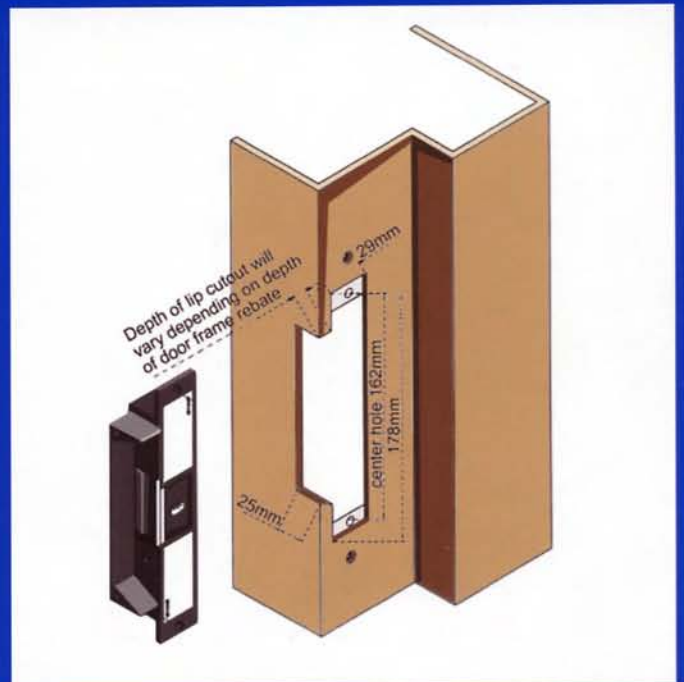

MECHANICAL DOOR LOCK CONFIGURATION

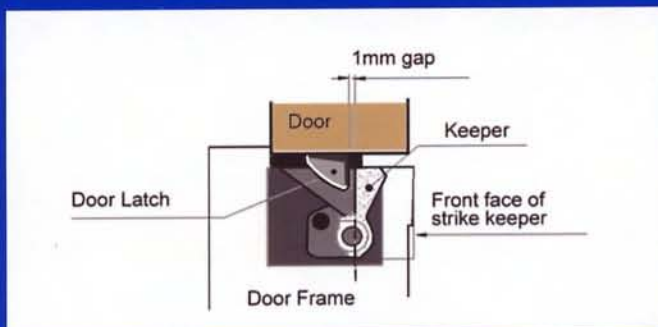

CUT OUT DIMENSIONS

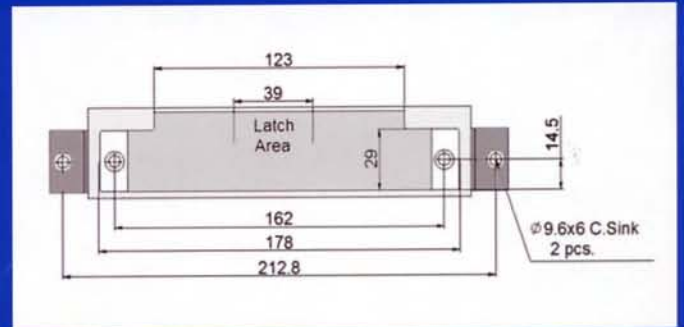

FIRE & SECURITY HARDWARE P/L

ABN 23 096 112 417

"New Generation Electric Locking Solutions"

DISTRIBUTOR

www.fshlocking.com.au