



A.D.S MasterMatic PTY LTD

4 Colrado ct
Hallam, VICTORIA 3803
www.adsmastermatic.com.au
info@adsmastermatic.com.au
P: (03) 9796 3611
F: (03) 9796 3823




A-2 AIRTIGHT DOOR

AUTOMATIC DOOR SYSTEM SERIES



A-2 AIRTIGHT DOOR

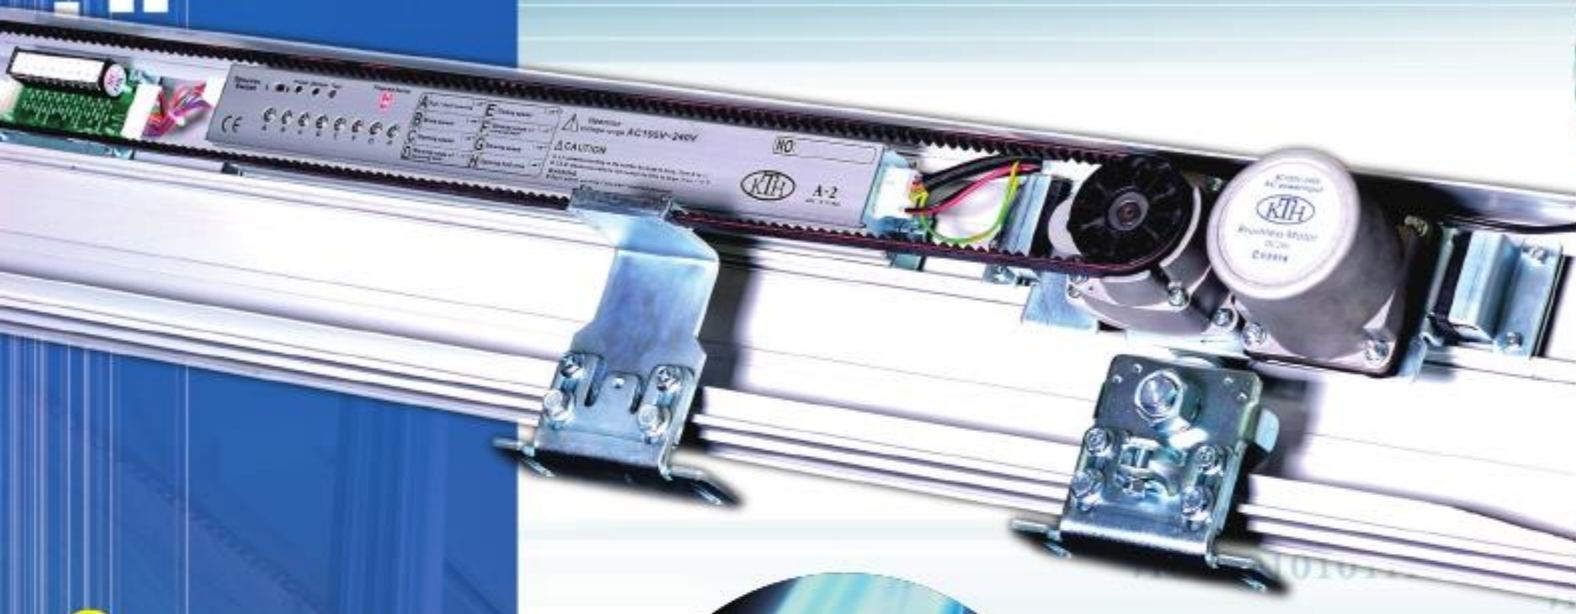

HANGERS
★ Stable and durable
★ Quiet and smooth




BRUSHLESS DC MOTOR
★ 120W Brushless DC motor



MICRO-CONTROLLER
★ Intelligence operator provides
8 functions of door's motions.



FILLISTER
★ Within this design, it can make door
downward and toward inside to
create "AIRTIGHT" function.

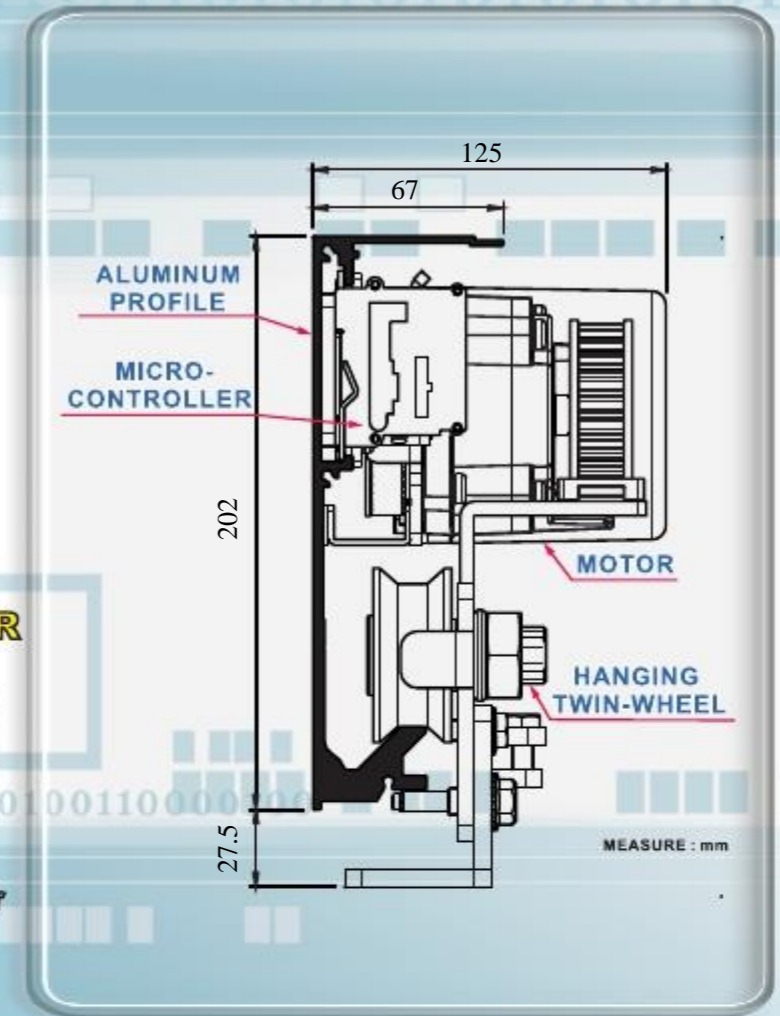

FEATURES

- Applied for hospital ,cleaning room.
- Efficiently avoid outer air to get in or temperature affection.
- Smooth operating and running frequently is unobstructed due to use Deft Volume&high efficient Brushless DC Motor.
- Closed door is alright, through "V" mold and "Arc" mold of fillister of Aluminum Profile to make door download and toward inside when closing.

TYPE	A-2
MODEL	STANDARD SINGLE-WINGED
DOOR WEIGHT	200kg X1 (DOOR)
DOOR WIDTH	500mm~3000mm
INSTALL WAY	SURFACE INSTALL
MOTOR	DC24V 120W BRUSHLESS DC MOTOR
CONTROL	STANDARD MICRO-CONTROL
POWER CONSUMPTION	120W
VOLTAGE	AC100V~240V
ENVIRONMENTAL TEMPERATURE	-20°C~+50°C
VOLUME	60 DECIBEL(MAX.)
STARTING SPEED	480mm/SEC.
STARTING TIMES	0~20 SEC. (REGULABLE)
TRANSMISSION IMPORTANT CONDITION	RACK BELT S8M
OPENING DOOR RANGE	FULL/HALF-OPEN (REGULABLE)
PFC POWER EFFICIENCY	0.95(IN AC100V FULL LOAD)
TRACTION FORCE	3.5 kg