

SW-2 SWING DOOR


AUTOMATIC DOOR SYSTEM SERIES

A.D.S MasterMatic PTY LTD


4 Colrado ct
 Hallam, VICTORIA 3803
www.adsmastermatic.com.au
info@adsmastermatic.com.au
 P: (03) 9796 3611
 F: (03) 9796 3823



SW-2 SWING DOOR

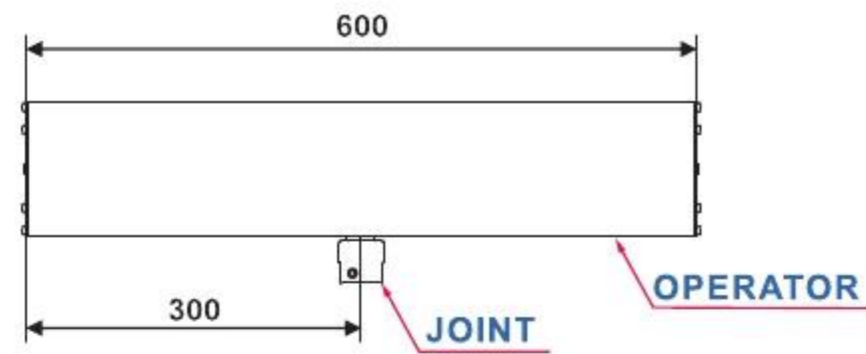

FRONT VIEW

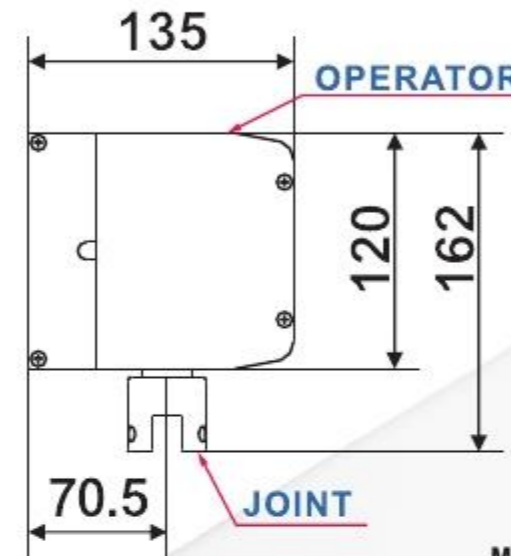

SIDE VIEW


MEASURE : mm



● **OUTWARD ARM ASSEMBLY**



● **INWARD ARM ASSEMBLY**

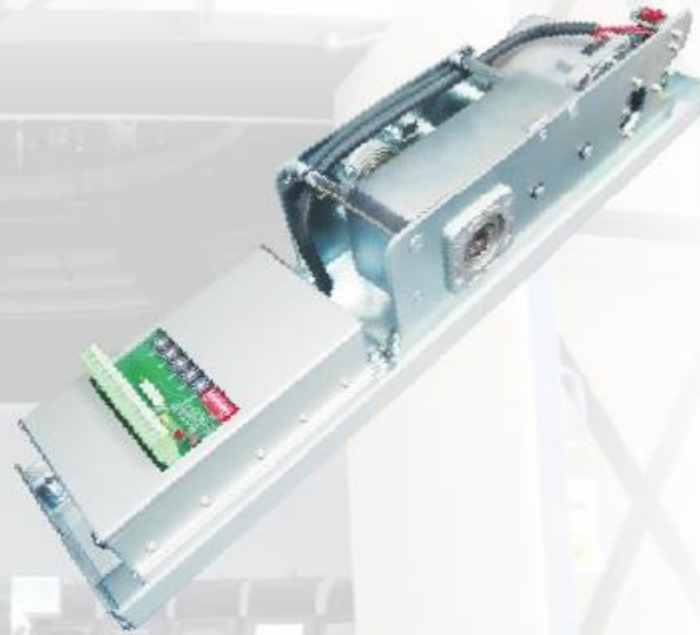

SPECIFICATION

TYPE	SW-2	
	OUTWARD	INWARD
MODEL	OUTWARD	INWARD
MOTOR	DC24V 120W BRUSHLESS DC MOTOR	
CONTROL	STANDARD MICRO-CONTROL	
POWER CONSUMPTION	120W	
VOLTAGE	AC100V-240V	
ENVIRONMENTAL TEMPERATURE	-20°C--+50°C	
VOLUME	55 DECIBEL(MAX.)	
SPEED of OPENING 90° TIME	0.2-0.5 SEC.(MAX.)	
STARTING TIMES	0-20 SEC. (REGULABLE)	
TRANSMISSION IMPORTANT CONDITION	OUTWARD ARM ASSEMBLY	INWARD ARM ASSEMBLY
OPENING DOOR RANGE	120° (MAX.)/90° (DEFAULT)	
PFC POWER EFFICIENCY	0.95(IN AC100V FULL LOAD)	
TRACTION FORCE	2.5 kg	

- **LOADING WEIGHT:**
250KG X 1M/150KG X 1.5M
- “CATCH RETURN” FUNCTION, IT MUST BE SAFER FOR USER.
- PARTICULAR MEMORY MODE FOR “OPENING DISTANCE SETTING”.
- TWO LOCK FUNCTIONS COULD BE CHOSEN:
(FAIL-SAFE/FAIL-SECURE) ELECTRIC LOCK.