




TH-W2/AD-W2

TELESCOPIC DOORS

AUTOMATIC DOOR SYSTEM SERIES

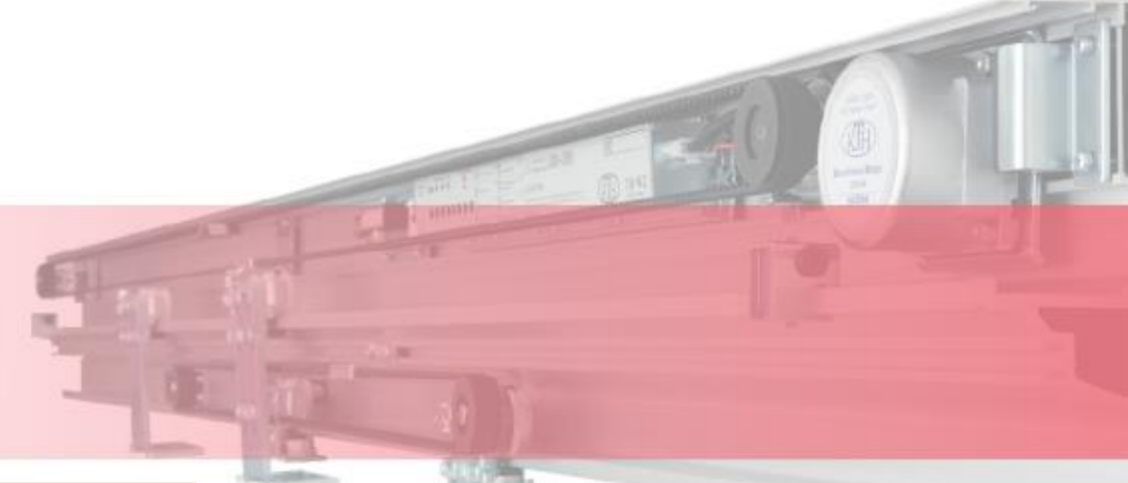

Airtight Door Sliding Door Telescopic 3-Wings Door Telescopic 2-Wings Door Curved/Round Door Swing Door Heavy Duty Door

A.D.S MasterMatic PTY LTD

4 Colorado ct
Hallam, VICTORIA 3803
www.adsmastermatic.com.au
info@adsmastermatic.com.au
P: (03) 9796 3611
F: (03) 9796 3823




TH-W2 / AD-W2 TELESCOPIC DOORS




OUR TELESCOPIC DOOR OPERATOR'S FEATURES

- ★ Maximum use in a limited space. It's suitable for places where a wider opening required.
- ★ Unique Aluminum Track design
- ★ Elegant Appearance for any buildings and architecture
- ★ Highly using spaces for more room
- ★ Excellent Quality & High-performance

Door thickness less than 40 mm

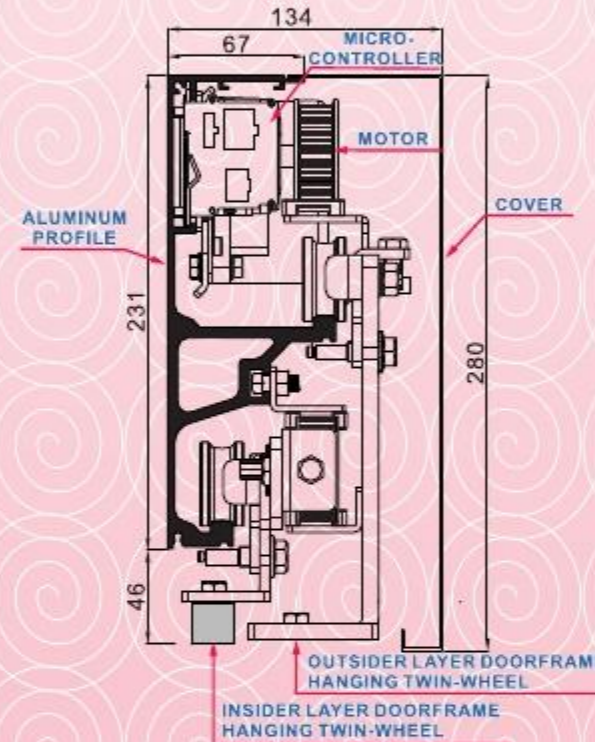

Door thickness over than 40 mm

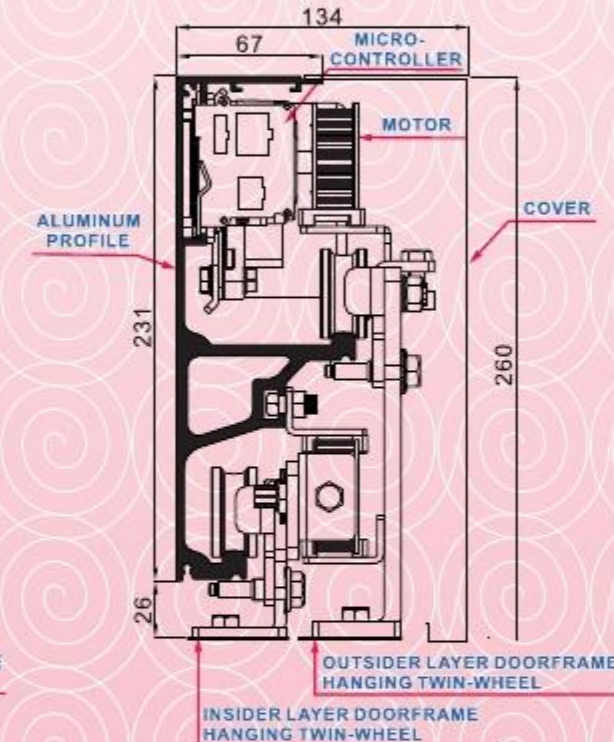

MEASURE : mm

TYPE	TH-W2	
	TELESCOPIC 2-WINGED	TELESCOPIC 4-WINGED
MODEL	130kg X2(DOOR)	90kg X4(DOOR)
DOOR WEIGHT	500mm-3000mm	500mm-3000mm
DOOR WIDTH	SURFACE INSTALL	SURFACE INSTALL
INSTALL WAY	DC24V 75W BRUSHLESS DC MOTOR	
MOTOR	STANDARD MICRO-CONTROL	
CONTROL	75W	
POWER CONSUMPTION	AC100V-240V	
VOLTAGE	-20°C~+50°C	
ENVIRONMENTAL TEMPERATURE	60 DECIBEL(MAX.)	
VOLUME	650mm/SEC.	600mm/SEC.
STARTING SPEED	0-20 SEC. (REGULABLE)	
STARTING TIMES	RACK BELT S8M	
TRANSMISSION IMPORTANT CONDITION	FULL/HALF-OPEN (REGULABLE)	
OPENING DOOR RANGE	0.95(IN AC100V FULL LOAD)	
PFC POWER EFFICIENCY	3 kg	
TRACTION FORCE		

TYPE	AD-W2	
	TELESCOPIC 2-WINGED	TELESCOPIC 4-WINGED
MODEL	130kg X2(DOOR)	90kg X4(DOOR)
DOOR WEIGHT	500mm-3000mm	500mm-3000mm
DOOR WIDTH	SURFACE INSTALL	SURFACE INSTALL
INSTALL WAY	DC24V 75W WORM GEAR MOTOR	
MOTOR	USER-FRIENDLY MICRO-CONTROL	
CONTROL	75W	
POWER CONSUMPTION	AC100V-240V	
VOLTAGE	-20°C~+50°C	
ENVIRONMENTAL TEMPERATURE	60 DECIBEL(MAX.)	
VOLUME	650mm/SEC.	600mm/SEC.
STARTING SPEED	0-20 SEC. (REGULABLE)	
STARTING TIMES	RACK BELT S8M	
TRANSMISSION IMPORTANT CONDITION	FULL/HALF-OPEN (REGULABLE)	
OPENING DOOR RANGE	0.95(IN AC100V FULL LOAD)	
PFC POWER EFFICIENCY	3 kg	
TRACTION FORCE		